



Hego™



Vintage

The Perfect HDF Laminate Flooring

With our new product laminate line HEGO VINTAGE we take a step further in our journey . With a floor that is the combination of beautiful designs , long- lasting ability & V-Groove lock design . Our laminate floors are made with perfection with ability to withstand years of use .

YOUR LIVING SPACE SHOULD BE A PLACE TO RELAX WHERE YOU FEEL TO INVITE FRIENDS . A PLACE TO REST WITHOUT ANY WORRY ON YOUR MIND.

Best
Durability

Beautiful
Surface
Textures

Impact
Resistance

Scratch
Resistant

Water Resistant
Edge Coating

Durability


Antistatic

Hygienic



CLOSE UP


RUSTIC CHESTNUT

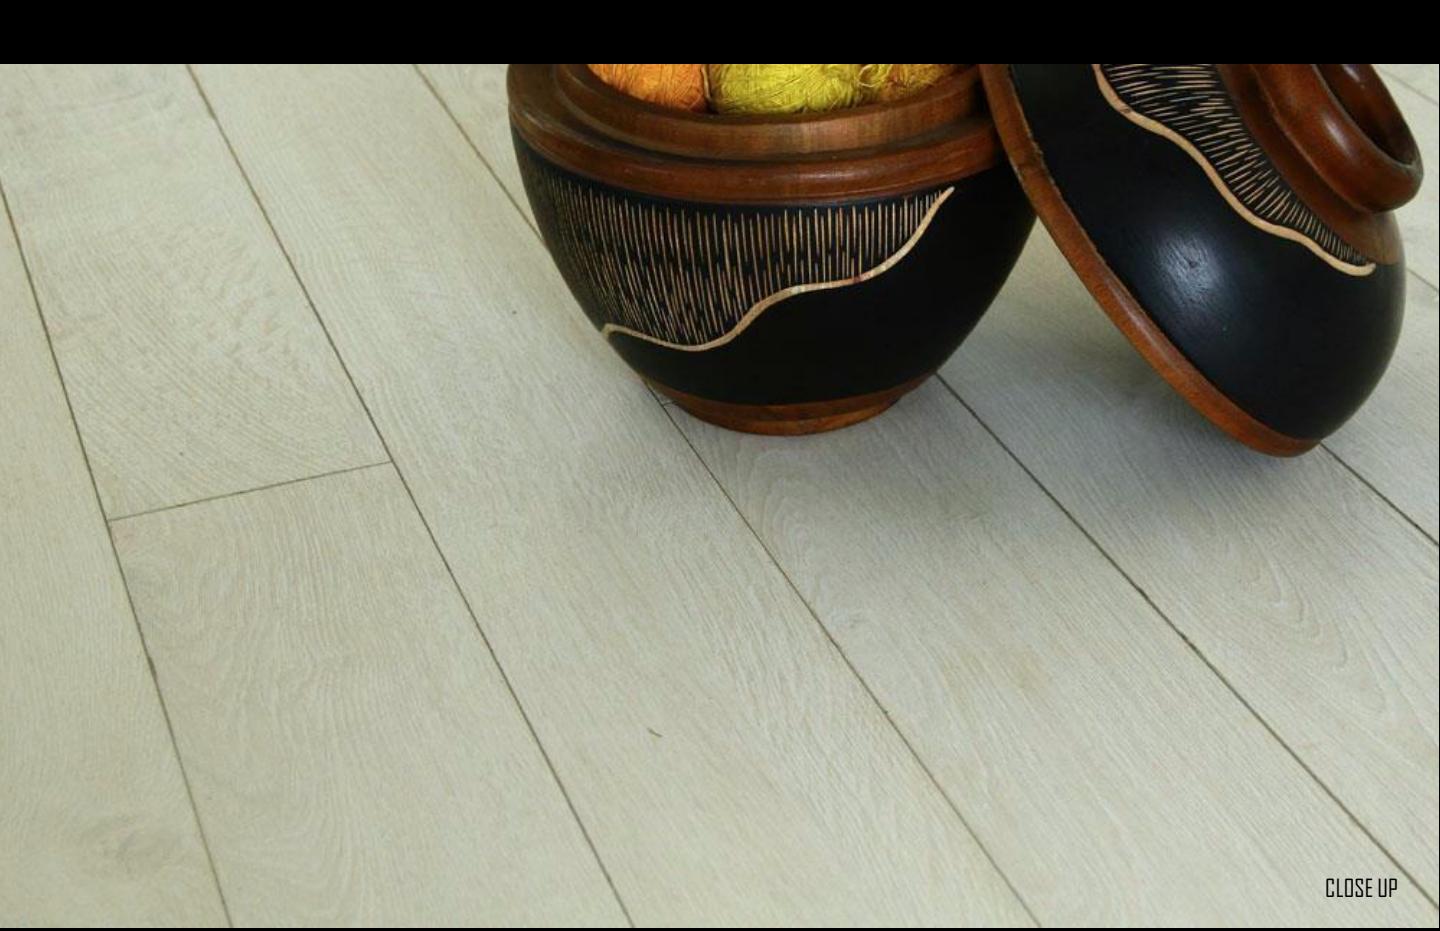

CLOSE UP



CANADIAN MAPLE

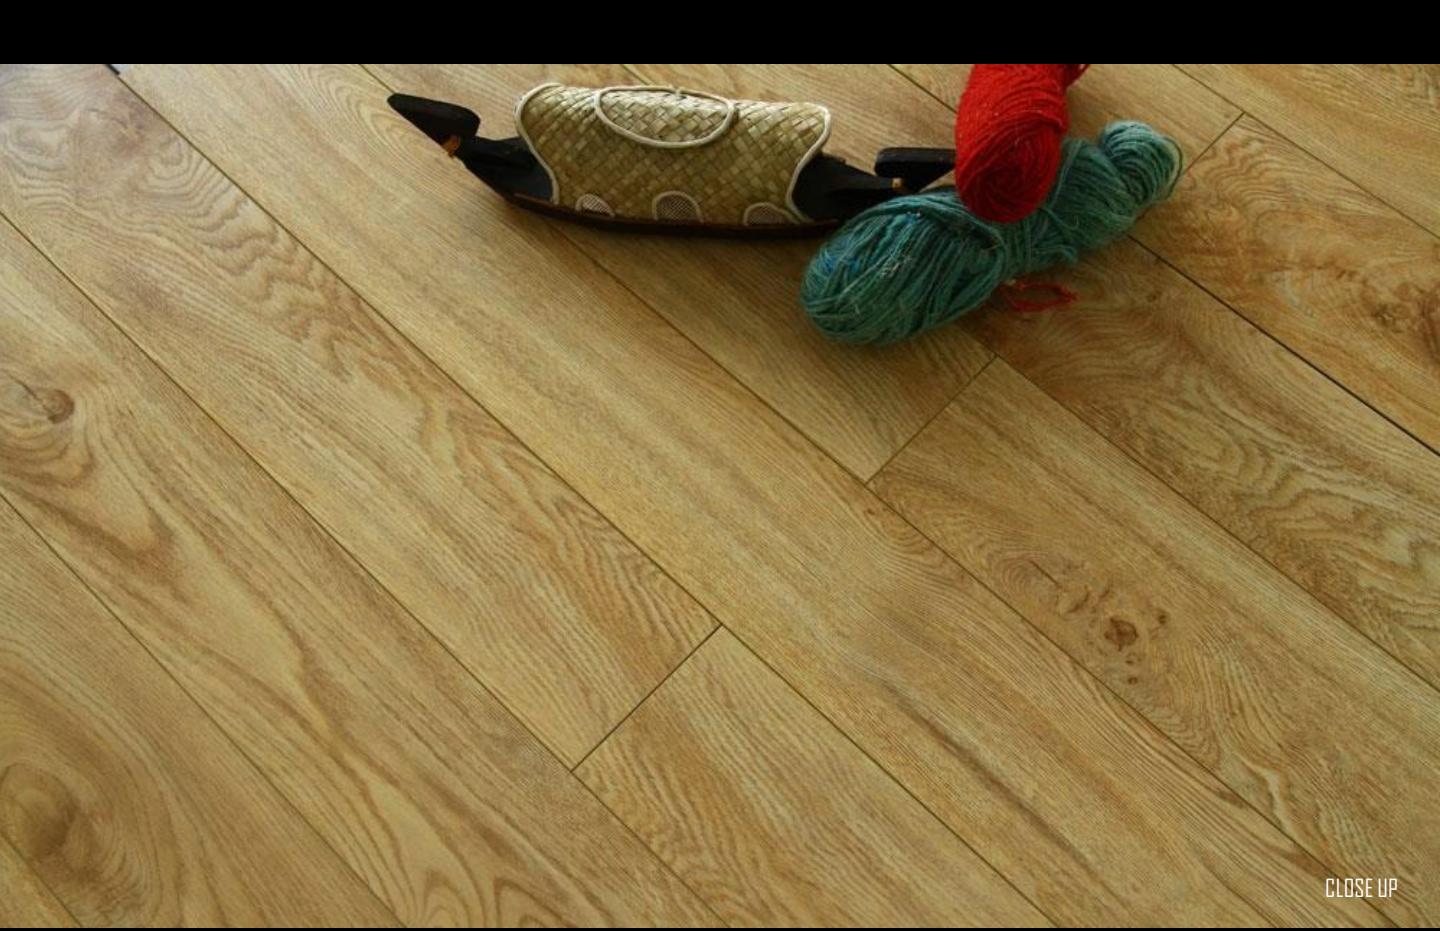

CLOSE UP




POLAR OAK



CLOSE UP

HARVEST OAK

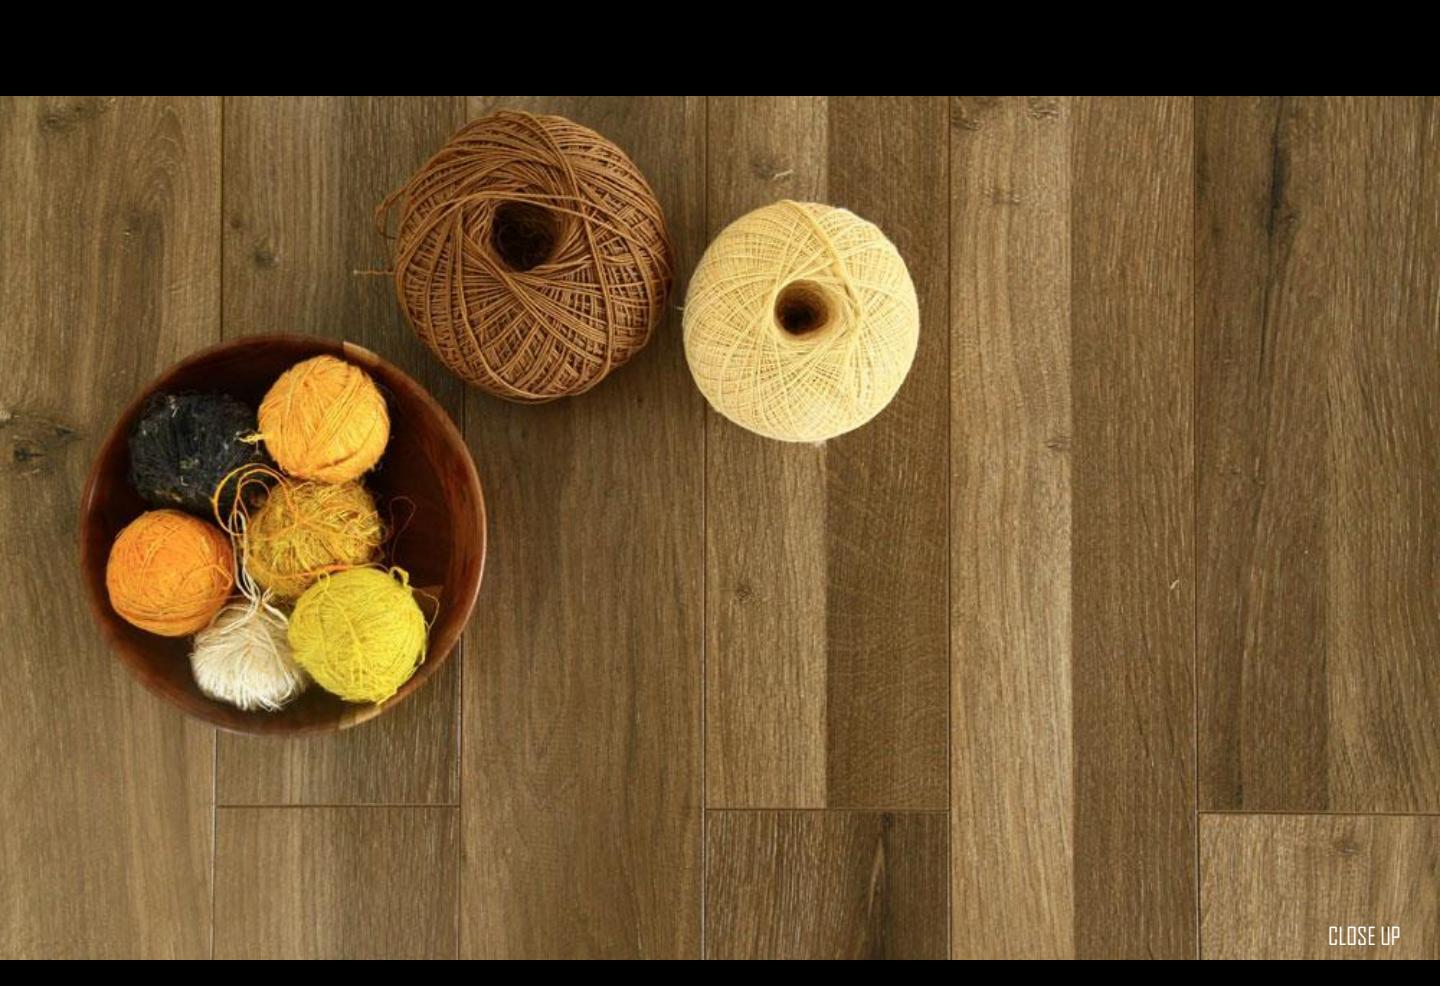

CLOSE UP

CANADIAN BRICK



CLOSE UP

STERLING OAK



CLOSE UP

EXOTIC WENGE



CLOSE UP



TUSCANY WALNUT



TECHNICAL SPECIFICATIONS

Description	Direct Pressure Laminate according to EN 13329 for glue less installation	
Fields of use	Vintage is suitable for heavy domestic and light commercial use (EN 13329 - 32)	

CLASSIFICATION



Level of use 22 Heavy residential use	EN 13329	Bed rooms, living rooms, home offices, etc.
Level of use 32 Light commercial use	EN 13329	Offices, kids play room, changing rooms, low traffic areas, etc.
Abrasion resistance	EN 13329, annex E	AC 4
Impact resistance	EN 13329, annex F	1C 2
Reaction to fire	DIN 4102 T1 EN 13501-1	B1 C ₄ s1
Dynamic coefficient of friction	EN 13893 EN 14041	m ³ 0.3 DS
Anti Static characteristics	Test of Vintage according to DIN EN 1815	Laboratory test is fulfilled
Resistance to staining	EN 438-2	Materials of group 1 + 2: ³ grade 5 Materials of group 3: ³ grade 4
Resistance to cigarette burns	EN 438-2	Slight change of the surface's grade 4
Light fastness	EN ISO 105- B02 EN 20105- A02	Blue wool scale: ³ 6 Grey scale: ³ 4
Static indentation	EN 433	No visible change, i.e. $\Delta 0.01$ mm indentation using a straight steel cylinder, $\Delta E = 11,30$ mm.
Effect of a furniture leg	EN 424	No change in appearance or damage, as defined in EN 425. Single-wheel castors, as defined in EN 12529:1998, 5.4.4.2 (Type W) shall be used.
Effect of a castor chair	EN 425	No change in appearance or damage, as defined in EN 425. Single-wheel castors, as defined in EN 12529:1998, 5.4.4.2 (Type W) shall be used.
Formaldehyde emission	DIN EN 14041	E1

WARRANTY: The laminate flooring has a warranty against fading, staining and wearing through. This warranty applies only to the original purchaser, and proof of purchase must be retained for all claims. The warranty covers the replacement or refund of the product but does not include labor involved. Chips and scratches are not covered by the warranty (laminate may chip or scratch if a sharp object is dropped on it or dragged across it), warping (laminate will warp if excessive moisture gets into the boards), or bridging (occurs when insufficient expansion space was provided). Claims for these problems will not be considered. Claims for wear must show a minimum 1/2 inch diameter area. This warranty is pro-rated based on the amount of time the floor has been installed. For example, on the product having a 5 years warranty if you have a claim after 4 years we would refund or replace 20% of the laminate value.

Due to limitation in printing technology slight colour variation may occur. There can be 5% +/- in technical specification due to manufacturing process. Hegen reserves the right to alter its products line without prior notice.





TECHNICAL DETAILS

Abrasion Resistance	AC4
Dimensions (Decor)	1215 mm x 126 mm
Thickness of Element	8.3 mm
Embossing	Silk Surface
Locking	Unilin Click With V-Groove & Wax Coating
Package	18 planks / 29.65 sq.ft.

NOTE - A slight variation in grains, knots & colour are been given to get the antique & natural look in some shade of Vintage laminate flooring , which does not mean manufacturing defect or batch variation.

DESIGN



- 1. Wearable Overlay**
Transparent layer is pressure, stain, scratch and wear resistant.
- 2. Decorative Paper**
Innovative and high definition decor paper with beautiful looks
- 3. Moisture Resistant HDF Core**
High Density fiberboard made of Wet -Land Pine, moisture resistant and Environment friendly.
- 4. Innovative locking technology**
Quality design, simple installation, durable locking.
- 5. Stabilizing Layer**
Balance a floor to be straight, with moisture resistant function.

Cleaning & Maintenance

Clean all liquid spills immediately. Simply dust mop or vacuum with a soft brush or wood-floor accessory to keep your floor clean from dust, dirt, or grit. A damp cloth or mop can be used without damage to the laminate panels, but do not use excessive water. Never spray water directly on to floor. Dry the floor thoroughly with a clean, soft cloth. Do not use soap based detergent, abrasive cleaner or combined "clean and shine" product on your laminate floor. Do not use steel wool or other souring pads that may scratch laminate panels. Do not wax or polish your laminate flooring. apply felt pads to furniture legs to avoid scratches. Save a few extra boards for the future to replace a damaged panel.